


## RJT weld liner pressed - 316

Nom size	A	B	C	D	Max Op @ 150°C Pressure (bar)	Stock No
1"	25.65	22.2	41.0	11.0	10	1003-5026
1½"	38.35	34.9	54.0	11.0	10	1003-5038
2"	51.05	47.6	67.0	12.0	10	1003-5051
2½"	63.75	60.3	79.0	12.0	10	1003-5064
3"	76.45	73.0	92.0	12.0	10	1003-5076
4"	101.85	97.6	118.0	14.0	10	1003-5102

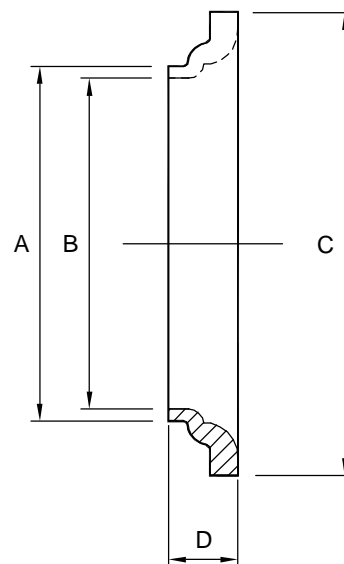

### Technical Data:

- Material: 316 Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: BS 4825 : Part 5 : 1991 (1" to 4" inclusive)
- Applications : RJT fittings are suitable for frequently dismantled sections of pipework used widely in the food, beverage and dairy industries
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Viton®, Nitrile, & Solid PTFE

- We stock a comprehensive range of RJT fittings including maleparts, nuts, liners, blanks, seals, blank nut and chains, bends, tees, hoseliners, spanners and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

1003 - V01

### NOTES

FORM No:FM002-V02

Axiom Process Ltd  
Hendy Industrial Estate  
Hendy, Swansea  
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882  
 (F) +44 (0)1792 886 049  
 (E) [info@axiumprocess.com](mailto:info@axiumprocess.com)  
 (W) [www.axiumprocess.com](http://www.axiumprocess.com)