


## IDF weld liner - 316 BS4825

Nom size	A	B	C	Max Op Pressure (bar) @ 20°C	Stock No
1"	33.8	29.2	21.5	10	2004-5026
1½"	47.0	42.7	21.5	10	2004-5038
2"	60.5	56.2	21.5	10	2004-5051
2½"	74.0	69.9	21.5	10	2004-5064
3"	87.5	82.6	21.5	10	2004-5076
4"	120.6	111.1	30.0	10	2004-5102

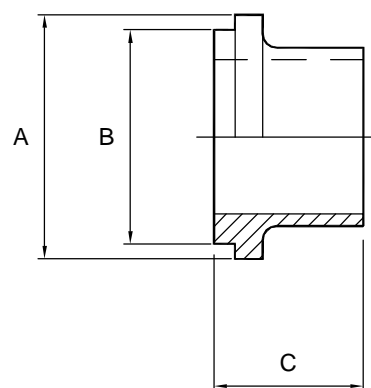

### Technical Data:

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• Material: 316 Stainless Steel</li> <li>• Finish: 0.8RA or better</li> <li>• Pressure/Temperature: See above (temp according to seal material)</li> <li>• Associated standards: BS 4825 : Part 4 : 1991 (1" to 4" inclusive)</li> <li>• Applications : Used widely throughout the dairy industry</li> </ul> | <ul style="list-style-type: none"> <li>• Tolerance: +/- 0.5mm</li> <li>• Seals: EPDM, Silicone, Viton®, Nitrile, &amp; Solid PTFE</li> </ul> |
|---|--|

- We stock a comprehensive range of IDF fittings including maleparts, nuts, blanks, seals, blank nut and chains, bends, tees, hoseliners, spanners and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

2004 - V01

### NOTES

Axium Process Ltd  
Hendy Industrial Estate  
Hendy, Swansea  
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882  
 (F) +44 (0)1792 886 049  
 (E) [info@axiumprocess.com](mailto:info@axiumprocess.com)  
 (W) [www.axiumprocess.com](http://www.axiumprocess.com)

FORM No:FM002-V02