


## IDF seal - Nitrile BS4825

Nom size	A	B	C	Max Op Pressure (bar) @ 20°C	Stock No
1"	23.2	32.5	7.0	10	2043-1026
1½"	35.9	46.0	7.0	10	2043-1038
2"	48.6	59.5	7.0	10	2043-1051
2½"	61.3	73.2	7.0	10	2043-1064
3"	74.0	86.5	7.0	10	2043-1076
4"	98.6	119.0	9.6	10	2043-1102

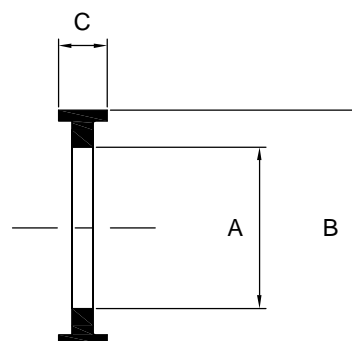

### Technical Data:

- Material: Nitrile
- Finish: Raw
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: BS 4825 : Part 4 : 1991 (1" to 4" inclusive)
- Applications : Used widely throughout the dairy industry
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Viton®, & Solid PTFE

- We stock a comprehensive range of IDF fittings including maleparts, liners, nuts, blanks, blank nut and chains, bends, tees, hoseliners, spanners and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

2043 - V01

### NOTES

Axium Process Ltd  
Hendy Industrial Estate  
Hendy, Swansea  
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882  
 (F) +44 (0)1792 886 049  
 (E) [info@axiumprocess.com](mailto:info@axiumprocess.com)  
 (W) [www.axiumprocess.com](http://www.axiumprocess.com)

FORM No:FM002-V02