


## SMS blank - 316

Nom size	A	B	Max Op Pressure (bar) @ 150°C	Stock No
1"	35.5	7.6	10	3019-5026
1½"	55.0	8.0	10	3019-5038
2"	65.0	9.2	10	3019-5051
2½"	80.0	11.0	10	3019-5064
3"	93.0	11.0	10	3019-5076
4"	118.0	11.0	10	3019-5102
4"	127.0	11.0	10	3019-5103

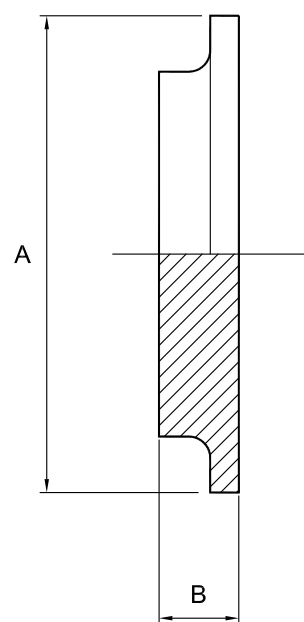

### Technical Data:

- Material: 316 Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: SMS1148
- Applications : SMS fittings are suitable for frequently dismantled systems
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Nitrile,

- We stock a comprehensive range of SMS fittings including maleparts, nuts, liners, blanks, seals, bends, tees, hoseliners, and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

D3019 - V02

### NOTES

Axium Process Ltd  
Hendy Industrial Estate  
Hendy, Swansea  
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882  
 (F) +44 (0)1792 886 049  
 (E) info@axiumprocess.com  
 (W) www.axiumprocess.com