


SMS seal - EPDM

Nom size	A	B	C	Max Op Pressure (bar) @ 150°C	Stock No
1"	22.5	32.0	5.5	10	3043-2026
1½"	35.5	48.0	5.5	10	3043-2038
2"	48.5	61.0	5.5	10	3043-2051
2½"	60.5	73.5	5.5	10	3043-2064
3"	72.0	86.0	5.5	10	3043-2076
4"	101.6	114.0	5.5	10	3043-2102

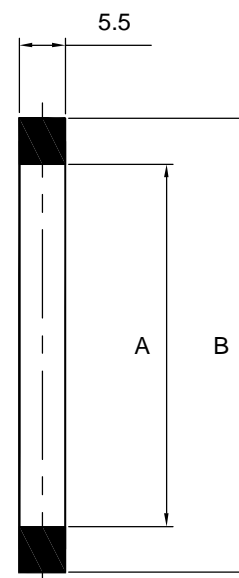

Technical Data:

- Material: EPDM
- Finish: Raw
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: SMS1148
- Applications : SMS fittings are suitable for frequently dismantled systems
- Tolerance: +/- 0.5mm
- Seals: Silicone, Nitrile,

- We stock a comprehensive range of SMS fittings including maleparts, nuts, liners, blanks, seals, bends, tees, hoseliners, and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

3043 - V01

NOTES

Axium Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882
 (F) +44 (0)1792 886 049
 (E) info@axiumprocess.com
 (W) www.axiumprocess.com

FORM No:FM002-V02