


SMS female hoseliner - 316

| Nom size | A | B | Max Op Pressure (bar) @ 150°C | Stock No |
|----------|-------|-------|-------------------------------|-----------|
| 1" | 25.4 | 57.5 | 10 | 3073-5026 |
| 1½" | 38.1 | 59.0 | 10 | 3073-5038 |
| 2" | 50.8 | 89.0 | 10 | 3073-5051 |
| 2½" | 63.5 | 89.0 | 10 | 3073-5064 |
| 3" | 76.2 | 110.0 | 10 | 3073-5076 |
| 4" | 101.2 | 112.0 | 10 | 3073-5102 |

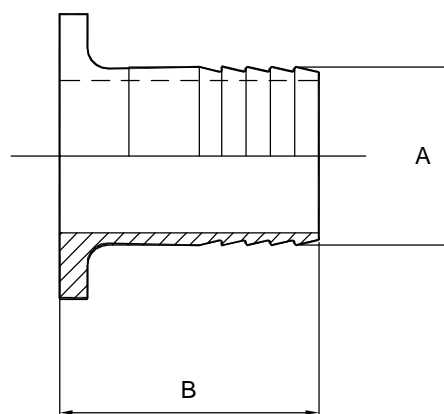

Technical Data:

- Material: 316 Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: SMS1148
- Applications : SMS fittings are suitable for frequently dismantled systems
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Nitrile,

- We stock a comprehensive range of SMS fittings including maleparts, nuts, liners, blanks, seals, bends, tees, hoseliners, and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

3073 - V01

NOTES

Axium Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882
 (F) +44 (0)1792 886 049
 (E) info@axiumprocess.com
 (W) www.axiumprocess.com

FORM No:FM002-V02