


3076

SMS 90° bend - M/F - 316

Nom size	A	B	R	Max Op Pressure (bar) @ 150°C	Stock No
1"	72.5	80.0	38.1	10	3076-5026
1½"	94.0	105.0	57.2	10	3076-5038
2"	119.0	130.0	76.2	10	3076-5051
2½"	144.0	159.0	95.3	10	3076-5064
3"	165.0	179.0	114.3	10	3076-5076
4"	207.0	230.0	152.4	10	3076-5102

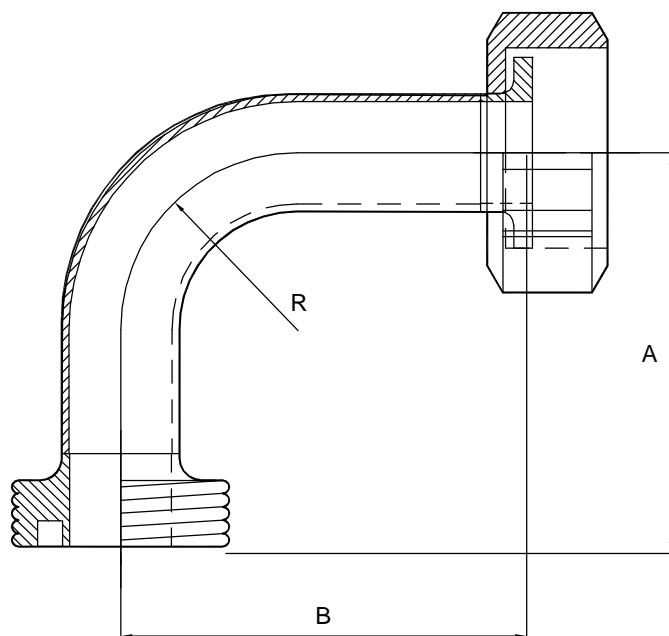

Technical Data:

- Material: 316 Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: SMS1148
- Applications : SMS fittings are suitable for frequently dismantled systems
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Nitrile,

- We stock a comprehensive range of SMS fittings including maleparts, nuts, liners, blanks, seals, bends, tees, hoseliners, and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

3076 - V01

NOTES

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

FORM No:FM002-V02

Axium Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

(T) +44 (0)1792 883 882
 (F) +44 (0)1792 886 049
 (E) info@axiumprocess.com
 (W) www.axiumprocess.com