


DIN weld liner - 316 DIN11851

Nom size	A	B	C	Max Op Pressure (bar) @ 20°C	Stock No
10mm	12.2	9.0	14.0	10	4004-5010
15mm	18.2	15.0	14.0	10	4004-5015
20mm	22.2	19.0	14.0	10	4004-5020
25mm	29.0	26.0	22.0	10	4004-5025
1"	25.4	22.1	22.0	10	4004-5026
32mm	35.0	32.0	25.0	10	4004-5032
1½"	38.1	34.8	26.0	10	4004-5038
40mm	41.0	38.0	26.0	10	4004-5040
50mm	53.0	50.0	28.0	10	4004-5050
2"	50.8	47.5	28.0	10	4004-5051
2½"	63.5	60.2	32.0	10	4004-5064
65mm	70.0	66.0	32.0	10	4004-5065
3"	76.2	72.9	37.0	10	4004-5076
80mm	85.0	81.0	37.0	10	4004-5080
100mm	104.0	100.0	44.0	10	4004-5100
4"	101.6	97.4	44.0	10	4004-5102
150mm	154.0	150.0	37.0	10	4004-5150

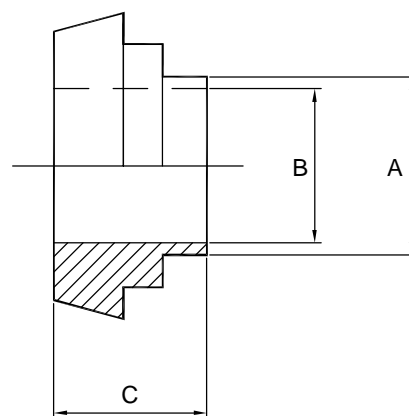

Technical Data:

- Material: 316 Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: DIN 11851, DIN, 11850, DIN 11864, and DIN 11887
- Applications : DIN fittings are suitable for most hygienic applications, particularly in the food, beverage and pharmaceutical industries
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Viton®, Nitrile, & Solid PTFE

- We stock a comprehensive range of DIN fittings both imperial and metric, including maleparts, liners, nuts, bends, hoseliners, tees, and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.




4004 - V01

NOTES

FORM No:FM002-V02

Axiom Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

 +44 (0)1792 883 882
 +44 (0)1792 886 049
 info@axiumprocess.com
 www.axiumprocess.com