


DIN blank - 316

DIN11851

Nom size	A	B	C	Max Op Pressure (bar) @ 20°C	Stock No
10mm	22.0	18.0	9.0	10	4019-5010
15mm	28.0	24.0	9.0	10	4019-5015
20mm	36.0	30.0	11.0	10	4019-5020
1"/25mm	44.0	35.0	13.0	10	4019-5026
32mm	50.0	41.0	13.0	10	4019-5032
1½"/40mm	56.0	48.0	13.0	10	4019-5038
2"/50mm	68.0	61.0	14.0	10	4019-5051
2½"/65mm	86.0	79.0	16.0	10	4019-5064
3"/80mm	100.0	93.0	16.0	10	4019-5076
4"/100mm	121.0	114.0	20.0	10	4019-5102
6"/150mm	176.0	163.0	24.0	10	4019-5154

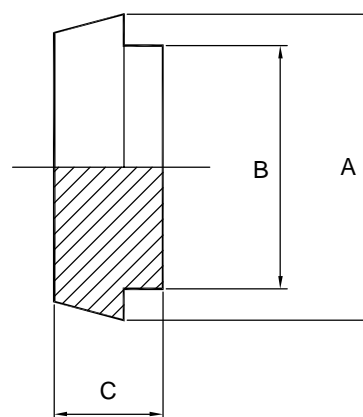

Technical Data:

- Material: 316 Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: DIN 11851, DIN, 11850, DIN 11864, and DIN 11887
- Applications : DIN fittings are suitable for most hygienic applications, particularly in the food, beverage and pharmaceutical industries
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Viton®, Nitrile, & Solid PTFE

- We stock a comprehensive range of DIN fittings both imperial and metric, including maleparts, liners, nuts, bends, hoseliners, tees, and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.





4019 - V01

NOTES

FORM No:FM002-V02

Axiom Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

 +44 (0)1792 883 882
 +44 (0)1792 886 049
 info@axiumprocess.com
 www.axiumprocess.com