


## DIN nut - 304 DIN11851

Nom size	A	B	Max Op Pressure (bar) @ 20°C	Stock No
10mm	38.0	18.0	10	4024-4010
15mm	44.0	18.0	10	4024-4015
20mm	54.0	20.0	10	4024-4020
1"/25mm	63.0	21.0	10	4024-4026
32mm	70.0	21.0	10	4024-4032
1½"/40mm	78.0	21.0	10	4024-4040
2"/50mm	92.0	22.0	10	4024-4050
2½"/65mm	112.0	25.0	10	4024-4065
3"/80mm	127.0	29.0	10	4024-4080
4"/100mm	148.0	31.0	10	4024-4100
6"/150mm	210.0	40.0	10	4024-4150

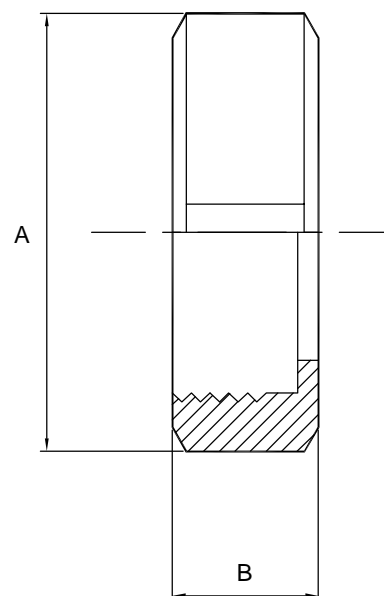

### Technical Data:

- Material: 304 Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: DIN 11851, DIN, 11850, DIN 11864, and DIN 11887
- Applications : DIN fittings are suitable for most hygienic applications, particularly in the food, beverage and pharmaceutical industries
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Viton®, Nitrile, & Solid PTFE

- We stock a comprehensive range of DIN fittings both imperial and metric, including maleparts, liners, nuts, bends, hoseliners, tees, and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

4024 - V01

### NOTES

FORM No:FM002-V02

Axium Process Ltd  
Hendy Industrial Estate  
Hendy, Swansea  
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882  
 (F) +44 (0)1792 886 049  
 (E) [info@axiumprocess.com](mailto:info@axiumprocess.com)  
 (W) [www.axiumprocess.com](http://www.axiumprocess.com)