


4043

DIN seal - Nitrile DIN11851

Nom size	A	B	C	Max Op Pressure (bar) @ 20°C	Stock No
10mm	20.0	12.0	4.5	10	4043-1010
15mm	26.0	18.0	4.5	10	4043-1015
20mm	33.0	23.0	4.5	10	4043-1020
1"/25mm	40.0	30.0	5.0	10	4043-1025
32mm	46.0	36.0	5.0	10	4043-1032
1½"/40mm	52.0	42.0	5.0	10	4043-1040
2"/50mm	64.0	54.0	5.0	10	4043-1050
2½"/65mm	81.0	71.0	5.0	10	4043-1065
3"/80mm	95.0	85.0	5.0	10	4043-1080
4"/100mm	114.0	104.0	6.0	10	4043-1102
5"/125mm	142.0	130.0	7.0	10	4043-1125

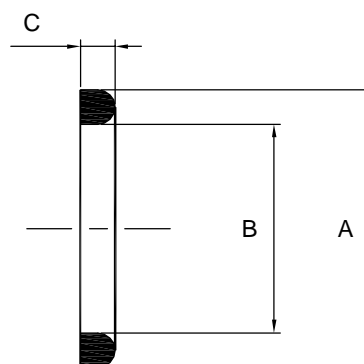

Technical Data:

- Material: Nitrile
- Finish: Raw
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: DIN 11851, DIN, 11850, DIN 11864, and DIN 11887
- Applications : DIN fittings are suitable for most hygienic applications, particularly in the food, beverage and pharmaceutical industries
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Viton®, & Solid PTFE

- We stock a comprehensive range of DIN fittings both imperial and metric, including maleparts, liners, nuts, bends, hoseliners, tees, and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

4043 - V01

NOTES

Axiom Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882
 (F) +44 (0)1792 886 049
 (E) info@axiumprocess.com
 (W) www.axiumprocess.com

FORM No:FM002-V02