


Plain-ended equal swept tee - 316L

| Nom size | A | B | R | Max Op Pressure (bar) @ 20°C | Stock No |
|----------|-------|-------|-------|------------------------------|-----------|
| 1" | 25.4 | 65.0 | 38.1 | 10 | 8064-6026 |
| 1½" | 38.1 | 85.0 | 57.2 | 10 | 8064-6038 |
| 2" | 50.8 | 110.0 | 76.2 | 10 | 8064-6051 |
| 2½" | 63.5 | 135.0 | 95.3 | 10 | 8064-6064 |
| 3" | 76.2 | 155.0 | 114.3 | 10 | 8064-6076 |
| 4" | 101.6 | 195.0 | 152.4 | 10 | 8064-6102 |

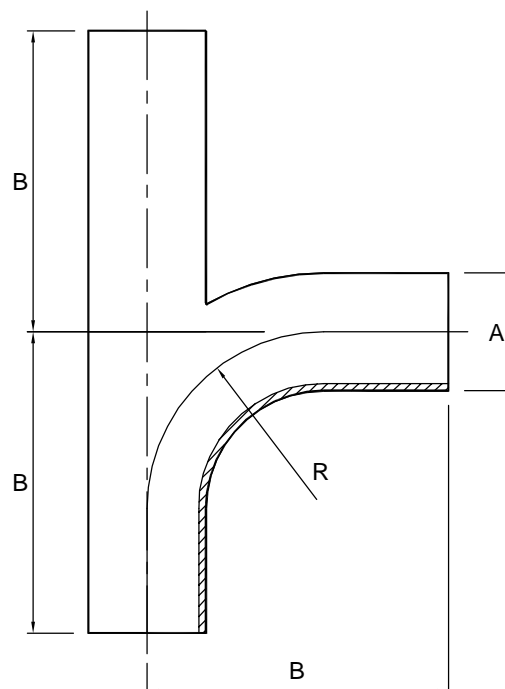

Technical Data:

- Material: 316L Stainless Steel
- Finish: 0.8RA or better
- Pressure: See above
- Associated standards: BS 4825 : Part 2 : 1991, ASTM A269, ASTM A270, ASTM A312
- Tolerance: +/- 0.5mm

- We stock a comprehensive range of plain-ended fittings including bends, tees, reducers, hosetails and equal cross pieces
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

8064-V01

FORM No:FM002-V02

NOTES

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

Axium Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

(T) +44 (0)1792 883 882
 (F) +44 (0)1792 886 049
 (E) info@axiumprocess.com
 (W) www.axiumprocess.com