8073

Plain-ended hosetail - 316L

Nom size	A	B	C	Max Op Pressure (bar) @ 20°C	Stock No
1/2"	12.7	50	24	10	8073-6013
5/8"	19.1	50	24	10	8073-6016
3/4"	19.1	50	24	10	8073-6019
1"	25.4	50	24	10	8073-6026
1 1/2"	38.1	50	24	10	8073-6038
2"	50.8	80	39	10	8073-6051
2 1/2"	63.5	80	39	10	8073-6064
3"	76.2	100	51	10	8073-6076
4"	101.6	100	51	10	8073-6102

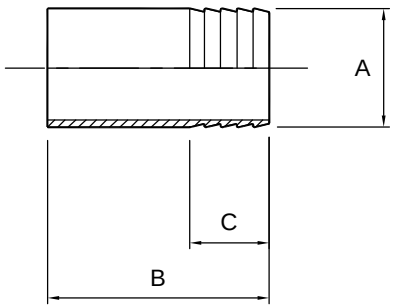

Technical Data:

- Material: 316L Stainless Steel
- Tolerance: +/- 0.5mm
- Finish: 0.8RA or better
- Pressure: See above
- Associated standards: BS 4825 : Part 2 : 1991, ASTM A269, ASTM A270, ASTM A312

- We stock a comprehensive range of plain-ended fittings including bends, tees, reducers, "Y" pieces, and equal cross pieces
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

8073-V01

NOTES

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

FORM No:FM002-V02

Axium Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

T +44 (0)1792 883 882
F +44 (0)1792 886 049
E info@axiumprocess.com
W www.axiumprocess.com

PDF created with pdfFactory Pro trial version www.pdffactory.com