


Dairy and food clamp ferrule BS 4825

Nom size Inch	A	B	C	WT	L	Max Op Pressure (bar) @ 150°C	Stock No
1/2"	21.4	9.52	12.7	1.59	21.5	50	5027-6013
3/4"	25.4	15.87	19.05	1.59	21.5	50	5027-6019
1"	50.5	22.20	25.65	1.73	21.5	50	5027-6026
1 1/2"	50.5	34.90	38.35	1.73	21.5	50	5027-6038
2"	64.0	47.60	51.05	1.73	21.5	50	5027-6051
2 1/2"	77.5	60.30	63.50	1.60	21.5	50	5027-6064
3"	91.0	72.80	76.0	1.60	21.5	40	5027-6076
4"	119.0	97.60	101.6	2.00	21.5	35	5027-6102

Machined from forging

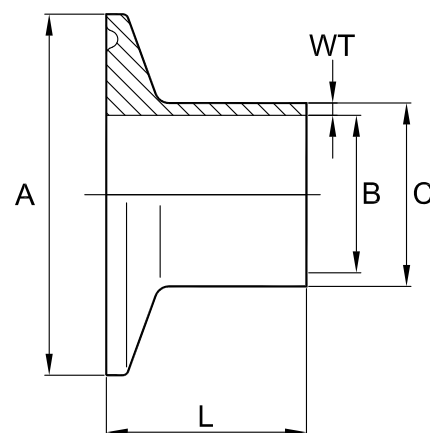

Technical Data:

- Material: 316L Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: DIN 32676 1990
- Applications : Clamp fittings are suitable for beverage, fine chemical, pharmaceutical and biotech applications, where crevice free conditions are critical.
- Seals: EPDM, Nitrile, Silicone, Platinum Cured Silicone, Encapsulated & Solid PTFE, Viton®
Viton® is a registered trademark of DuPont Dow Elastomers

- We stock a comprehensive range of clamp fittings including unions, ferrules, bends, tees, reducers, hoseliners and adaptors
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

D5027-V01

NOTES

Axium Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

(T) +44 (0)1792 883 882
 (F) +44 (0)1792 886 049
 (E) info@axiumprocess.com
 (W) www.axiumprocess.com