


## Clamp equal tee

Nom size	L	Max Op Pressure (bar) @ 20°C	Stock No
1/2"	59.5	10	5080-6013
3/4"	67.5	10	5080-6019
1"	65.0	10	5080-6026
1½"	85.0	10	5080-6038
2"	110.0	10	5080-6051
2½"	135.0	10	5080-6064
3"	155.0	10	5080-6076
4"	195.0	10	5080-6102

92° and 88° options available

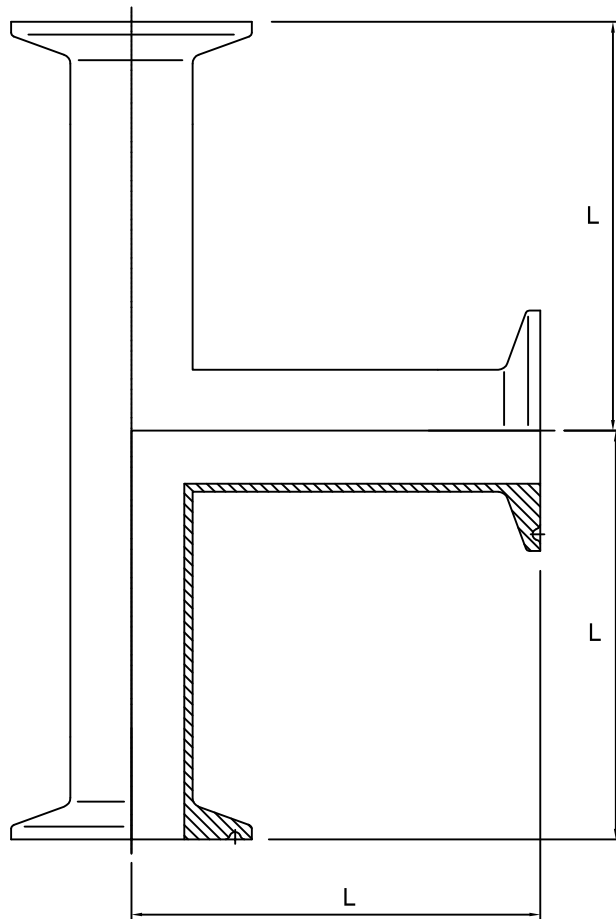

### Technical Data:

- Material: 316L Stainless Steel
- Finish: Welds removed ID & OD Polished 0.8Ra (0.4Ra available)
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: BS 4825 : Part 3 : 1991 (1" to 4" inclusive)
- Applications : Clamp fittings are suitable for beverage, fine chemical, pharmaceutical and biotech applications, where crevice free conditions are critical.
- Tolerance: +/- 0.5mm
- Seals: EPDM, Nitrile, Silicone, Platinum Cured Silicone, Encapsulated & Solid PTFE, Viton®  
Viton® is a registered trademark of DuPont Dow Elastomers

- We stock a comprehensive range of clamp fittings including unions, ferrules, bends, tees, reducers, hoseliners and adaptors
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

D5080 – V03/ECN 705

### NOTES

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

FORM No:FM002-V02  
 (T) +44 (0)1792 883 882  
 (F) +44 (0)1792 886 049  
 (E) info@axiumprocess.com  
 (W) www.axiumprocess.com