


BSPP to plain-ended adaptor - 316

Nom size	A	B	C	D	E	Max Op @ 150°C Pressure (bar)	Stock No
1/2"	12.7	20.9	30.0	15.0	9.5	10	6095-5013
3/4"	19.0	26.4	30.0	15.0	15.8	10	6095-5019
1"	25.4	33.2	30.0	15.0	22.2	10	6095-5026
1 1/4"	31.7	41.9	40.0	20.0	28.5	10	6095-5031
1 1/2"	38.1	47.8	40.0	20.0	34.9	10	6095-5038
2"	50.8	59.6	40.0	20.0	47.6	10	6095-5051
2 1/2"	63.5	75.1	50.0	25.0	60.3	10	6095-5064
3"	76.2	87.8	50.0	25.0	73.0	10	6095-5076
4"	101.6	113.0	-	-	98.4	10	6095-5102
5"	129.0	138.4	-	-	125.0	10	6095-5125
6"	154.0	163.8	-	-	150.0	10	6095-5154

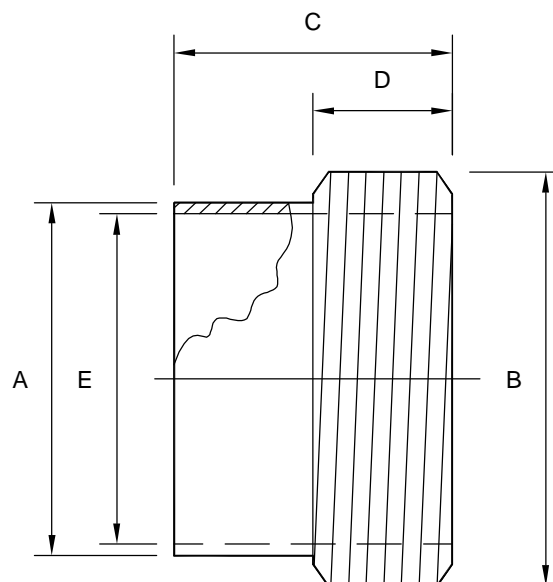

Technical Data:

- Material: 316L Stainless Steel
- Finish: Polished to 1.0 Ra
- Pressure/Temperature: See above
- Associated standards: BS 4825 Part 1(1" to 4" inclusive), BS21, ISO2037
- Applications : Non-hygienic
- Tolerance: +/- 0.5mm
- Seals: PTFE Tape or End Seal

- We stock a comprehensive range of BSP fittings including unions, ferrules, bends, tees, reducers, hoseliners and adaptors
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

D6095 – V01

NOTES

FORM No:FM002-V02

Axium Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

☎ +44 (0)1792 883 882
☎ +44 (0)1792 886 049
✉ info@axiumprocess.com
🌐 www.axiumprocess.com