


## BSP female equal socket

Nom size	A	B BSPP	C	Max Op @ 150°C Pressure (bar)	Stock No
1/8"	17.0	1/8"	14.0	10	6104-5003
1/4"	25.0	1/4"	18.5	10	6104-5006
3/8"	26.0	3/8"	21.3	10	6104-5009
1/2"	34.0	1/2"	26.4	10	6104-5013
3/4"	36.0	3/4"	31.8	10	6104-5019
1"	43.0	1"	39.5	10	6104-5026
1 1/4"	48.0	1 1/4"	48.3	10	6104-5031
1 1/2"	48.0	1 1/2"	54.5	10	6104-5038
2"	56.0	2"	66.3	10	6104-5051
2 1/2"	65.0	2 1/2"	82.0	10	6104-5064
3"	71.0	3"	95.0	10	6104-5076
4"	83.0	4"	122.0	10	6104-5102

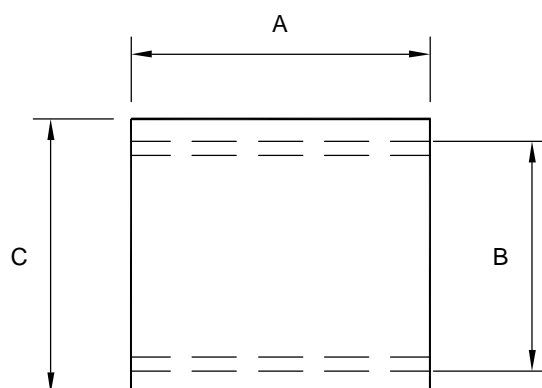

### Technical Data:

- Material: 316 Stainless Steel
- Finish: Descaled
- Pressure/Temperature: See above
- Associated standards: BS1740, BS1387
- Applications : Non-hygienic
- Tolerance: +/- 0.5mm
- Seals: PTFE Tape

- We stock a comprehensive range of BSP fittings including unions, ferrules, bends, tees, reducers, hoseliners and adaptors
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.





D6104 – V01

### NOTES

FORM No:FM002-V02

Axium Process Ltd  
Hendy Industrial Estate  
Hendy, Swansea  
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

 +44 (0)1792 883 882  
 +44 (0)1792 886 049  
 [info@axiumprocess.com](mailto:info@axiumprocess.com)  
 [www.axiumprocess.com](http://www.axiumprocess.com)