


814X-03

Sprayball 360° - 316L

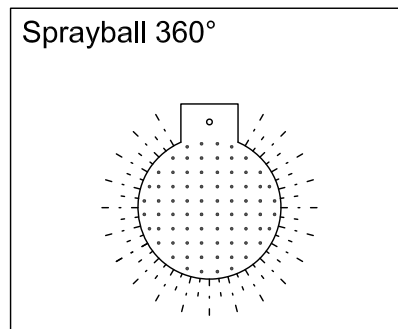

Dimensions				Applied Pressure	Flowrates		Cleaning Diameter	Stock No
Coverage	Supply tube OD	Ball diameter	Spray hole diameter	bar	Imperial gall/hr	m3/hr	Max. tank dia recommended (m)	
360	1"	65mm	1.6mm	2.0	1980	9	1.9	8143-6026
360	1.5"	65mm	1.6mm	2.0	2180	9.9	2.0	8143-6038
360	2"	89mm	1.6mm	2.0	3500	15.9	3.0	8146-6051

Technical Data:

- Material: 316L Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: 1-2 Bar Typ. / 0-134°C Typ.
- Associated standards: None
- Applications : Tank washing duties
- Tolerance: +/- 1mm
- Seals: N/A

- We also stock a comprehensive range of hygienic stainless steel fittings and components including manways, sightglasses, valves, filters, as well as clamp, RJT, IDF, DIN, SMS, BSP, Flange, Plain-ended tube and pipe fittings
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

D814X-03-V04/ECN 541

NOTES

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature