


1207

RJT blank nut & chain - 304

Nom size	A	B	Max Op pressure (bar) @ 150°C	Stock number
1"	50.8	22.2	10	1207-4026
1 1/2"	65.0	22.2	10	1207-4038
2"	79.4	22.2	10	1207-4051
2 1/2"	92.1	22.2	10	1207-4064
3"	104.8	22.2	10	1207-4076
4"	130.2	22.2	10	1207-4102

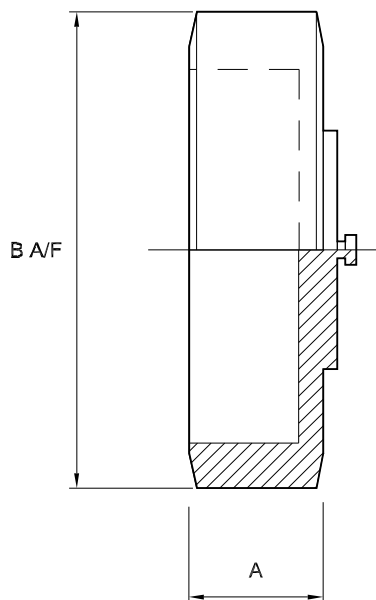

TECHNICAL DATA	
Associated Standards	BS 4825 : Part 5 : 1991 (1"-4" inclusive)
Material	304 stainless steel
Material Certification	BS EN 10204/DIN 50049 3.1
Pressure/Temperature	See table
Applications	RJT fittings are suitable for frequently dismantled section of pipework used widely in the food, beverage and dairy industries.
RJT Fittings Range	Unions, blanks, tees, bends, hoseliners, adaptors, concentric & eccentric reducers, Y pieces
Seals	EPDM, Nitrile, Silicone, Solid PTFE, Viton® (Viton is a registered trade mark of Dupont Dow Elastomers).
Notes	Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D1207-V02 / ECN 733

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



FS 83081

All data is provided in good faith and is subject to change