


5021- 4 Clamp Double Pin Heavy Duty - 304

Size Inch	C	D	Max Operating Pressure	Stock code
0.50" - 0.75"	25.4	36.6	50.0	5021-4013
1.00" - 1.50"	50.5	61.7	50.0	5021-4026
2.00"	64.0	75.2	50.0	5021-4051
2.50"	77.5	88.7	50.0	5021-4064
3.00"	91.0	102.2	40.0	5021-4076
3.50"	106.0	117.2	30.0	5021-4089
4.00"	119.0	130.2	25.0	5021-4102
4.50"	130.0	141.2	25.0	5021-4114
5.00"	144.4	157.6	25.0	5021-4129
5.50"	155.0	170.2	25.0	5021-4140
6.00"	167.0	182.2	20.0	5021-4154
6.58"	183.0	198.2	20.0	5021-4168
8.00"	217.4	233.0	15.0	5021-4204
8.58"	233.5	248.7	15.0	5021-4219
10.00"	268.0	284.2	12.0	5021-4254
12.00"	319.0	335.2	10.0	5021-4305

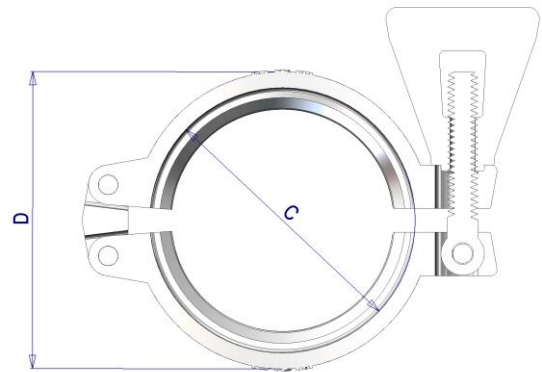

TECHNICAL DATA	
Associated Standards	1" – 4" : BS 4825-3 , ASME BPE 2009, ISO 1127 (2852), DIN 32676, SMS 3008
Material	304 Stainless Steel
Finish	Barrel Polish Finish = 1.0 µm Ra
Tolerance	+/- 1mm
Clamp Fittings Range includes:	Unions, ferrules, blanks, tees, bends, hoseliners, adaptors, concentric & eccentric reducers, Y pieces
Seals	FDA & USP Class VI approved polymers including EPDM, Nitrile, Silicone, Platinum Cured Silicone, Encapsulated & Solid PTFE, Viton® (Viton is a registered trade mark of Dupont Dow Elastomers).
Notes	Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D5021-4-V01

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



FS 83081

All data is provided in good faith and is subject to change