


5197

Clamp BSP male adaptor 316L (machined from solid) BS4825*

| Nom size fitting Clamp | BSP | A | B | C | L | Stock No |
|---------------------------|------|------|------|------|------|---------------|
| *1/2" | 1/4" | 25.4 | 10.0 | 10.0 | 30.0 | 5197-6013-006 |
| *1/2" | 3/8" | 25.4 | 10.0 | 10.0 | 30.0 | 5197-6013-009 |
| *1/2" | 1/2" | 25.4 | 16.0 | 16.0 | 32.0 | 5197-6013-013 |
| *1" | 3/8" | 50.5 | 22.0 | 22.0 | 30.0 | 5197-6026-009 |
| *1 1/2" | 3/8" | 50.5 | 22.0 | 22.0 | 35.0 | 5197-6038-009 |
| *1" | 1/2" | 50.5 | 22.0 | 22.0 | 35.0 | 5197-6026-013 |
| *1 1/2" | 1/2" | 50.5 | 22.0 | 22.0 | 35.0 | 5197-6038-013 |
| *1" | 3/4" | 50.5 | 22.0 | 22.0 | 35.0 | 5197-6026-019 |
| *1 1/2" | 3/4" | 50.5 | 22.0 | 22.0 | 35.0 | 5197-6038-019 |
| *1 1/2" | 1" | 50.5 | 35.0 | 35.0 | 35.0 | 5197-6038-026 |

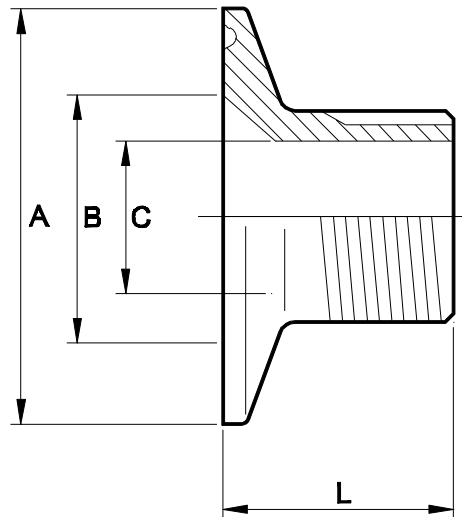

| TECHNICAL DATA | |
|---|---|
| Associated Standards | *BS 4825-3 (1"-4" inclusive) |
| Material | 316L Stainless Steel |
| Material Certification | BS EN 10204/DIN 50049 3.1 for all wetted parts |
| Finish | ID & OD, 0.8Ra (0.4 Ra available) |
| Options | Clamp – BSP female adaptor 316L also available |
| Clamp Fittings Range | Unions, ferrules, blanks, tees, bends, hoseliners, adaptors, concentric & eccentric reducers, Y pieces |
| Seals | FDA & USP Class VI approved polymers including EPDM, Nitrile, Silicone, Platinum Cured Silicone, Encapsulated & Solid PTFE, Viton® (Viton is a registered trade mark of Dupont Dow Elastomers). |
| Notes | Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature |
| GENERAL CAPABILITIES | |
| Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation | |
| Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification. | |

D5197-V05 ECN 725

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



FS 83081

All data is provided in good faith and is subject to change