


8115

Plain-ended non-return valve 316L

Nom size	A	B	C	Max Op Pressure (bar) @ 20 C	Stock No
1"	25.4	87.8	65.0	10	8115-6026
1 1/2"	38.2	106.3	80.0	10	8115-6038
2"	50.8	111.3	92.0	10	8115-6051
2 1/2"	63.5	125.3	104.0	10	8115-6064
3"	76.2	128.0	130.0	10	8115-6076
4"	101.6	135.0	130.0	10	8115-6102

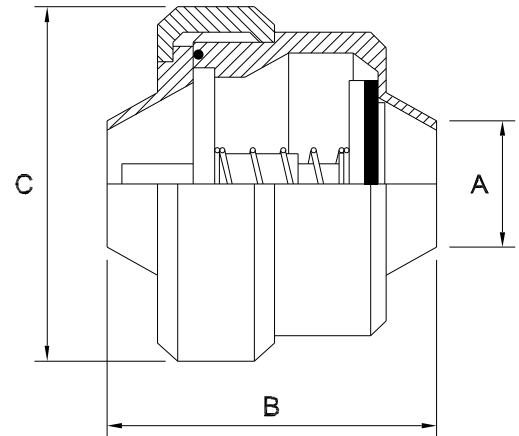

TECHNICAL DATA	
Associated Standards	
Material	316L Stainless Steel
Material Certification	BS EN 10204/FIN 50049 3.1 for all wetted parts
Finish	OD polished to 0.8 Ra (0.4Ra available), Descaled ID
Pressure/Temperature	Up to 10 bar at 20°C
Tolerance	+/- 0.5mm
Applications:	Spring loaded, are direction flow only, suitable for vertical and horizontal applications
Clamp Fittings Range	Unions, ferrules, blanks, tees, bends, hoseliners, adaptors, concentric & eccentric reducers, Y pieces
Seals	Nitrile, & Solid PTFE
Notes	Dimensions are provided in good faith. Seals must be chosen for required operating medium and temperature
GENERAL CAPABILITIES	
Design and System Fabrication, Hygienic Process Plant, Project Management, In-house Manual and Orbital Welding, Machining, Fabrication and Polishing, Component Customisation	
Full materials certification, weld maps, logs, welder qualifications and weld procedures, pickling, passivation and ferroxyl certification.	

D8115-V02 / ECN 730

CUSTOMISED STAINLESS STEEL SYSTEMS, FABRICATIONS AND COMPONENTS

Axium Process Ltd

Hendy Industrial Estate, Hendy, Swansea, UK SA4 0XP

Tel: +44 (0) 1792 883882

Fax: +44 (0) 1792 886049

Email: info@axiumprocess.com

Web: www.axiumprocess.com



All data is provided in good faith and is subject to change