


Plain-ended butterfly valve - 316L

Nom size	A	B	Max Op Pressure (bar) @ 20°C	Stock No
1"	25.4	68.0	10	8126-6026
1 1/2"	38.1	76.0	10	8126-6038
2"	50.8	80.0	10	8126-6051
2 1/2"	63.5	80.0	10	8126-6064
3"	76.2	82.0	10	8126-6076
4"	101.6	88.0	10	8126-6102

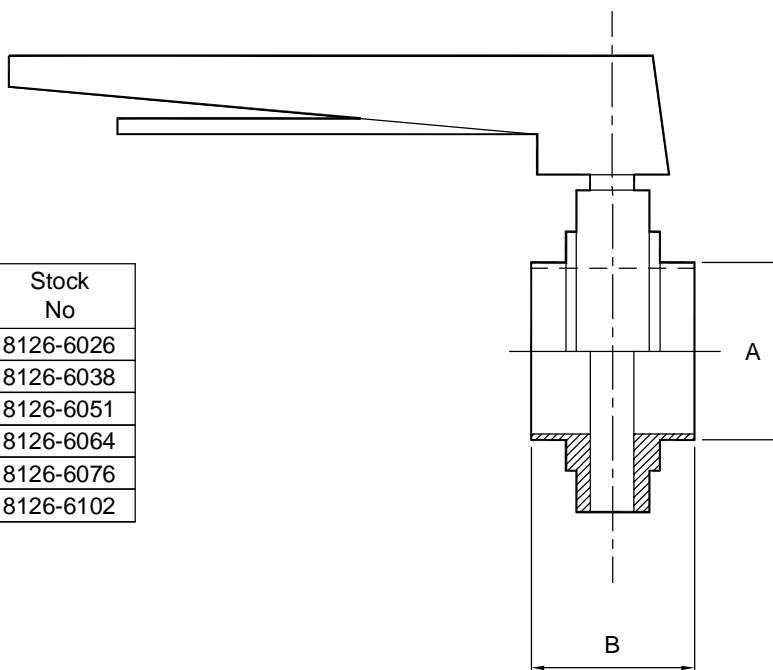

Technical Data:

- Material: 316L Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards:
- Applications : Designed for manual or automatic simple on/off duties
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Viton®, Nitrile, & Solid PTFE

- We also stock a comprehensive range of hygienic stainless steel fittings and components including tank manways, sightglasses, sprayballs, filters, as well as clamp, RJT, IDF, DIN, SMS, BSP, Flange, Plain-ended tube and pipe fittings
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

8126 - V01

NOTES

Axium Process Ltd
Hendy Industrial Estate
Hendy, Swansea
SA4 0XP UK

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature

FORM No:FM002-V02
 (T) +44 (0)1792 883 882
 (F) +44 (0)1792 886 049
 (E) info@axiumprocess.com
 (W) www.axiumprocess.com