


## RJT 45° bend - M/F - 316

Nom size	A	B	R	Max Op @ 150°C Pressure (bar)	Stock No
1"	29.0	72.2	38.1	10	1074-5026
1½"	37.0	91.0	57.2	10	1074-5038
2"	50.0	121.5	76.2	10	1074-5051
2½"	62.3	151.5	95.3	10	1074-5064
3"	75.0	181.3	114.3	10	1074-5076
4"	96.3	231.4	152.4	10	1074-5102

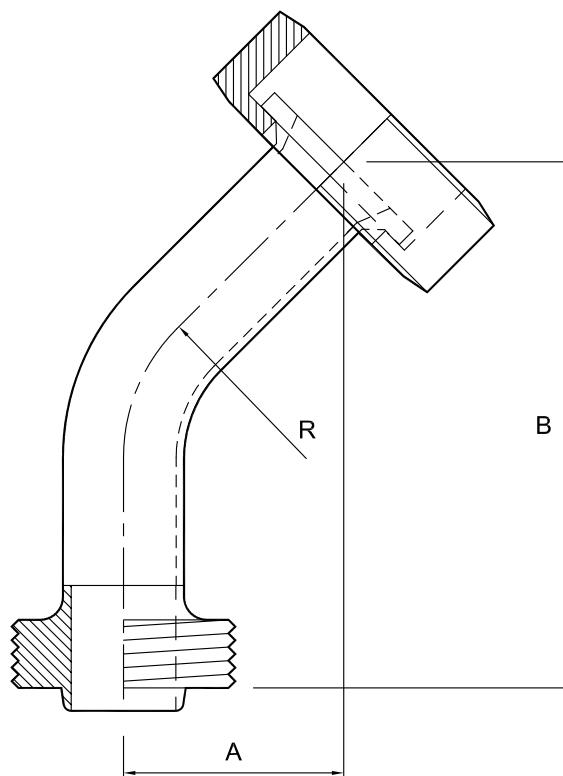

### Technical Data:

- Material: 316 Stainless Steel
- Finish: 0.8RA or better
- Pressure/Temperature: See above (temp according to seal material)
- Associated standards: BS 4825 : Part 5 : 1991 (1" to 4" inclusive)
- Applications : RJT fittings are suitable for frequently dismantled sections of pipework used widely in the food, beverage and dairy industries
- Tolerance: +/- 0.5mm
- Seals: EPDM, Silicone, Viton®, Nitrile, & Solid PTFE

- We stock a comprehensive range of RJT fittings including maleparts, nuts, liners, blanks, seals, blank nut and chains, bends, tees, hoseliners, spanners and reducers
- Components can be fabricated to customer specification
- Fabrication capabilities include frameworks, skid mounted systems, manifolds, jacketed assemblies, adaptors, flowplates and spool pieces.
- In-house services include machining, welding, fabrication, polishing.

D1074-V02

### NOTES

- Dimensions are provided in good faith but maybe subject to change
- Seals must be chosen for required operating medium & temperature